




XRS Roll Up Series Opener Wiring Diagram

3 Phase 208V

**IMPORTANT INFORMATION ABOUT WIRING AUTOMATIC CAR WASH CONTROLS TO THE XRS ROLL UP DOOR

All contacts from the car wash need to be DRY contacts. Voltage MUST NOT be sent from the car wash to the door. If car wash signals do send voltage relays must be used to convert these signals to dry contacts.


The opener for the XRS Roll Up Door uses DC control voltage. If voltage is sent to the opener from the car wash, improper operation or opener damage may occur.

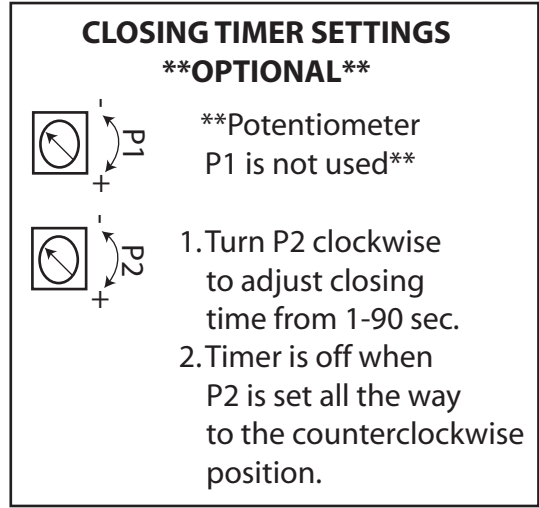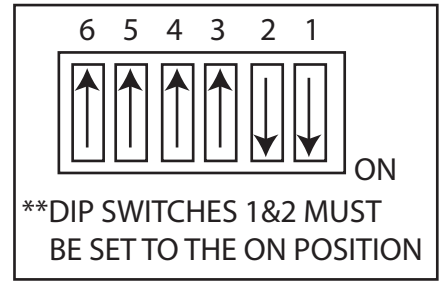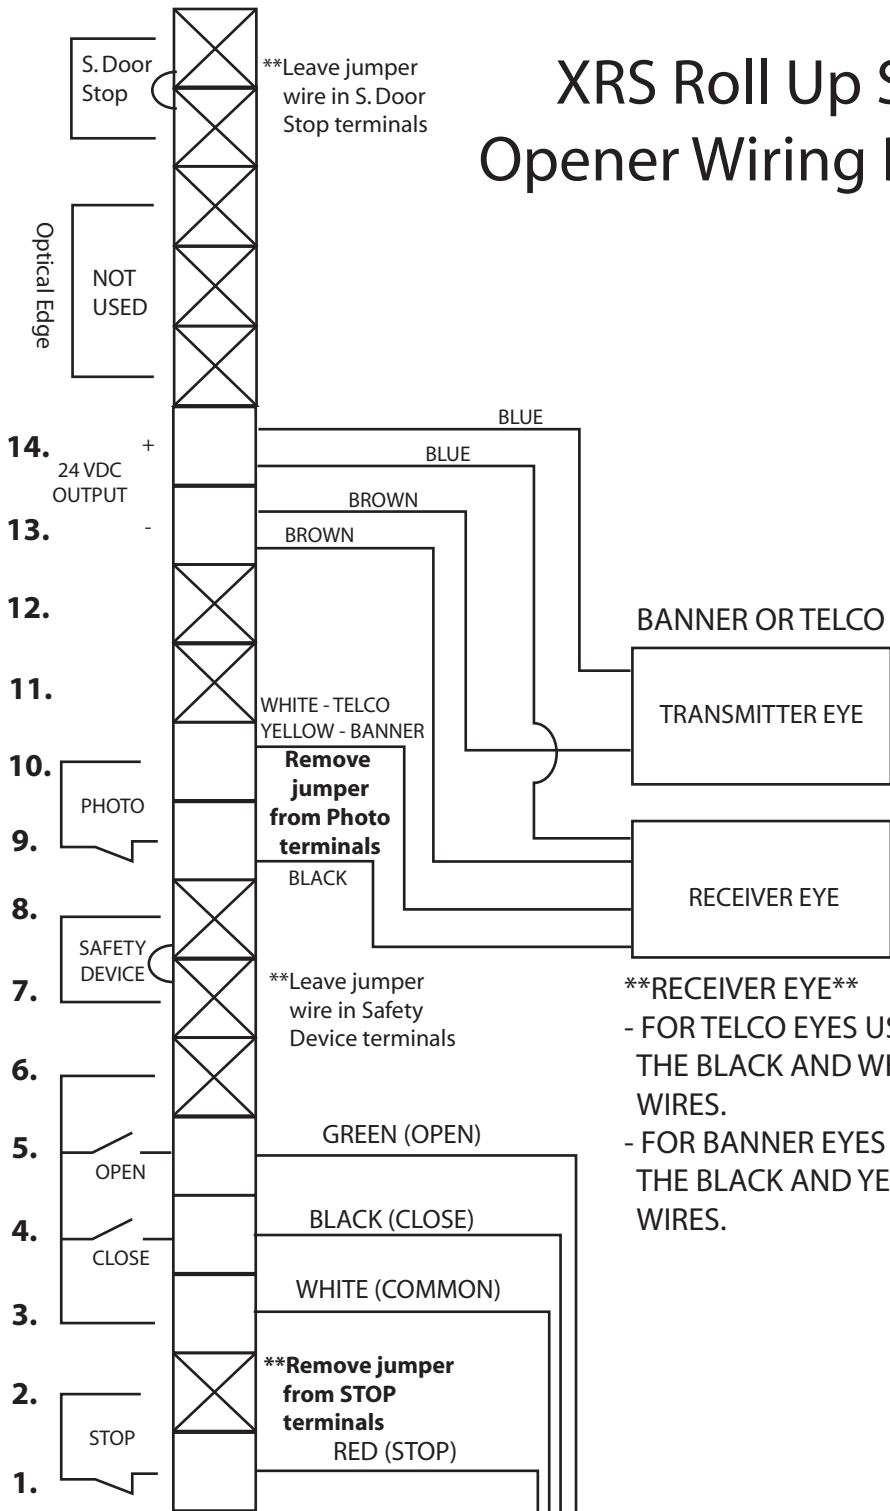

****Note: To be sure wires are run to the correct terminals, count up from the bottom and hook wires to corresponding terminals shown here.**

A terminal with a X through it is not used. Do not hook any wires to a terminal marked with a X.

FROM 3 BUTTON STATION

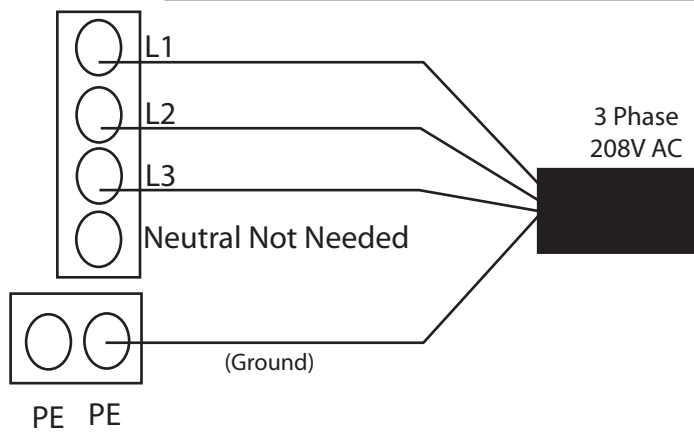

3 Phase 208V AC